

true-i



HMSH-100
Smart Home Gateway

SURVEILLANCE

- Real-time Video
- Event Recording
- IP Camera

HOME SECURITY

- Security Alarm Alert
- Remote Access Control
- Detect Intrusions/Events

HOME CONTROL

- Motorised Curtain
- Air-con & Lighting
- Samsung Digital Door Lock

COMMUNICATIONS

- Wireless Communication
- Push Message to Smart Phone

POWER MANAGEMENT

- Power Usage Status
- Customisable Preset Scenario

Smart Home App
(for Android / iOS mobile device)

www.true-i.com



**Connected Home @
Your Fingertips**
Anytime • Anywhere

- Real-time Monitoring & Control
- Intrusion Detection & Notification
- Event Alerts & Video Recording
- Multi-user Log-in & Control
- Energy Saving & Eco-Friendly

Your Preferred Smart Home Solution

Hassle-free Installation


- No complicated wiring
- Simple installation & setting
- Minimum maintenance

Expandable

- Add as many as 232 devices
- Multiple smart-phone controls simultaneously


Cost Effective

- Easy maintenance
- Reduce cabling & save cost

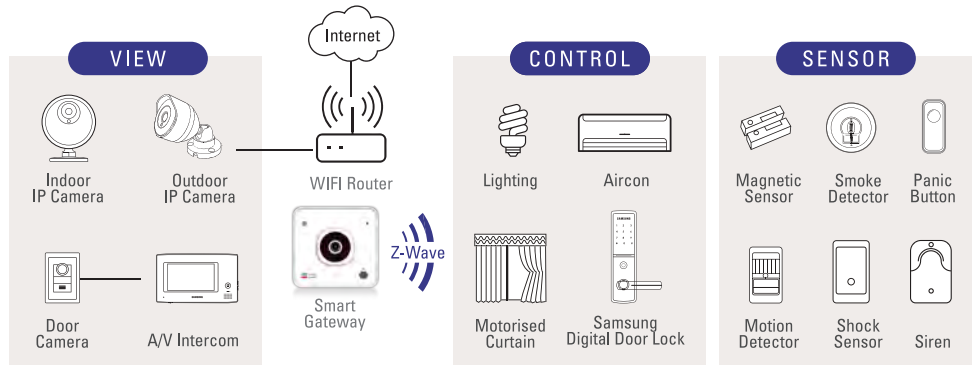

true-i

Smart Home Network Solution

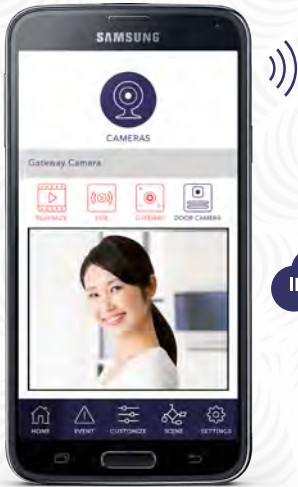


Samsung Digital Door Lock
Integrable with True-i Gateway:
SHP-DP728, SHP-DP727, SHS-P718
SHS-P717, SHS-H505

SURVEILLANCE

- Samsung IP Camera (Outdoor) *
- Samsung A/V Intercom *
- Samsung IP Camera (Indoor) *
- Samsung Door Camera

SECURITY

- Contact Sensor
- Shock Sensor
- Motion Detector
- Smoke Detector
- Panic Button
- Siren with Strobe



* AC 230V Power

CONTROL

- DIGITAL DOOR LOCK**
DDL Controller (HMDD-100 Module)
- AIRCON**
IR Transmitter
- LIGHTING**
In-Wall Switch / Dimmer *
- CURTAIN**
Curtain Controller *

ECO-POWER

- SMART PLUG ***
- ENERGY METER READER ***

Specifications	HMDM -100 Module	HMSH - 100 Gateway
Wireless Data Communication	Z-wave (868.42Mhz)	Z-wave (868.42Mhz) - Internal Antenna (Max 15m)
Dimensions	57 x 18.5 x 11.5 mm	86 x 86 x 31mm
Operation Temperature	-10 ~ 60 °C	-10 ~ 60 °C
Power Supply	DC 3.3V	DC 5V
Power Consumption	<50mA	2A
Ethernet (Wifi)	-	801.11b/g/n - Internal Antenna (Max10m)
Maximum Connectable Devices	-	232
Camera	-	HD 720P (MAX 30 fps) - Day/Night Vision
Installations	-	Flush Mount (Wall/ceiling) - Fit on 1 Gang Back Box

Remote & Real-time CHECK • CONTROL • COMMAND

www.true-i.com
www.hanman.net